


PTFE

# LATTYFLON 84 L

Flexible, modified filled PTFE sheet for difficult applications for static sealing

## MODIFIED FILLED PTFE SHEET FOR DIFFICULT APPLICATIONS

- TOTAL CHEMICAL INERTNESS\_X000D\_
- APPROVED FOOD CONTACT
- WATER-REPELLENT, NON-FLAMMABLE

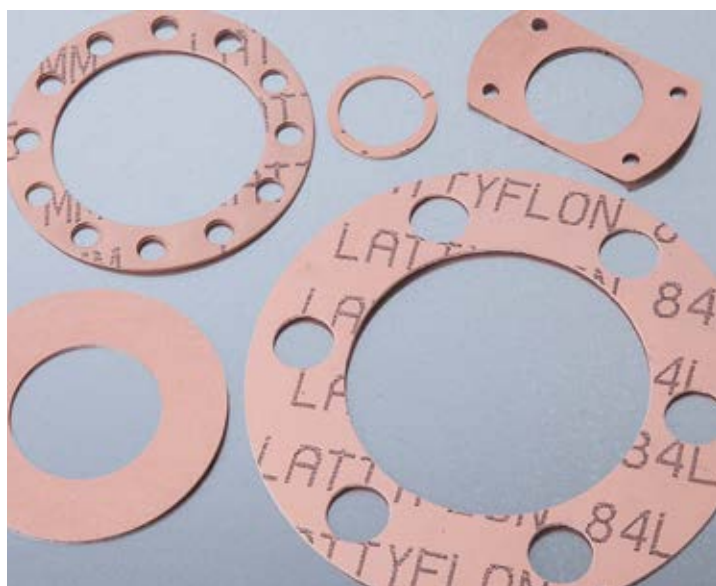

### OPERATING PARAMETERS (NOT ASSOCIATED)

Pressure : 0 to 85 bar  
 Temperature : -200 °C to 260°C  
 pH : 0 - 14

### COMPOSITION

Designed for all industries, chemically resistant to various fluids such as acids, solvents, hydrocarbons, chlorine, water and steam. Outstanding mechanical properties, very high resistance to creep, compression and wear, added to the outstanding PTFE properties for aggressive environments.

### TYPES OF INDUSTRIES



### FLUIDS

All types of fluids, limitation for fluorinated gases or molten alkali metals.

### GUIDELINES, STANDARDS AND APPROVALS



Item	Dimensions	Description
900019004	1,5 mm	1,5 m x 1,5 m
900019005	2 mm	1,5 m x 1,5 m
900019006	3 mm	1,5 m x 1,5 m