


PTFE

LATTYFLON 95

PTFE gasket, outstanding resistance in aggressive environments for static sealing

FLEXIBLE PTFE GASKET, OUTSTANDING RESISTANCE IN AGGRESSIVE ENVIRONMENTS

- SUITABLE FOR FLANGES WITH FRAGILE, CORRODED OR NEW SURFACES.
- VERY LOW RELAXATION

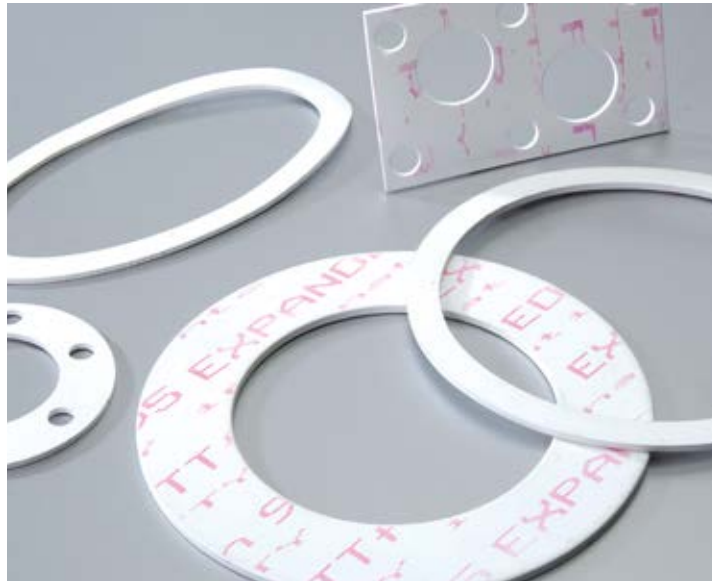

OPERATING PARAMETERS (NOT ASSOCIATED)

Pressure : 0 to 210 bar
 Temperature : -240 °C to 270 °C
 pH : 0 - 14

COMPOSITION

Pure expanded PTFE gasket whose high malleability allows sealing of even damaged flanges, while its very low relaxation under load guarantees high fitting reliability. Requiring a low tightening torque, this gasket material is recommended for the fitting of fragile glass lined or plastic flanges.

TYPES OF INDUSTRIES



FLUIDS

All types of fluids, restriction for fluorinated gases or molten alkali metals.

GUIDELINES, STANDARDS AND APPROVALS



Item	Dimensions	Description
50353	1 mm	1,5 m x 1,5 m
50354	1,5 mm	1,5 m x 1,5 m
50355	2 mm	1,5 m x 1,5 m
50190	3 mm	1,5 m x 1,5 m
69979*	6 mm	1,5 m x 1,5 m