

Aramid

LATTYGOLD 32

Calendered gasket of synthetic fibres with anti-stick treatment on both faces for static sealing

CALENDERED GASKET OF SYNTHETIC FIBRES WITH A MIX OF NBR-SBR ELASTOMERS

- ANTI-STICK TREATMENT ON BOTH FACES.
- SUITABLE FOR ANY TYPE OF INDUSTRIES



OPERATING PARAMETERS (NOT ASSOCIATED)

Pressure : 0 to 60 bar
 Temperature : 0 °C to 300°C

COMPOSITION


Gasket material made of synthetic fibres bonded together with a mix of NBR-SBR elastomers.

TYPES OF INDUSTRIES



FLUIDS

Applications for all slightly aggressive fluids (water, oil, fuels, etc.).

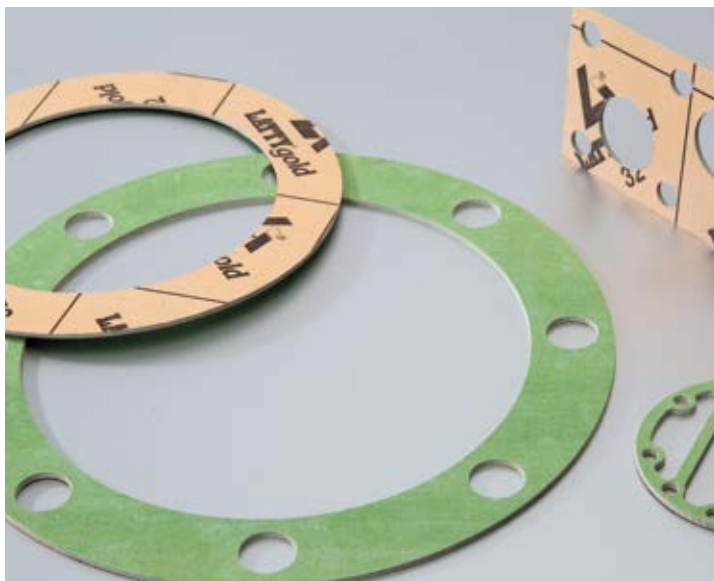

Item	Dimensions	Description
23488	1 mm	1 m x 1,5 m
46928	1 mm	1,5 m x 2 m
27692	1,5 mm	1,5 m x 2 m
23489	1,5 mm	1 m x 1,5 m
23490	2 mm	1 m x 1,5 m
26492	2 mm	1,5 m x 2 m
23491	3 mm	1 m x 1,5 m
27693	3 mm	1,5 m x 2 m