



Aramid

# LATTYGOLD 92

General-purpose aramid sheet material for static sealing

## VERY GOOD RESISTANCE TO MECHANICAL, THERMAL AND CHEMICAL STRESSES.

- ANTI-STICK TREATMENT ON BOTH FACES.
- FLEXIBLE GASKET MATERIAL, EASY TO CUT
- HIGH ELASTIC RECOVERY

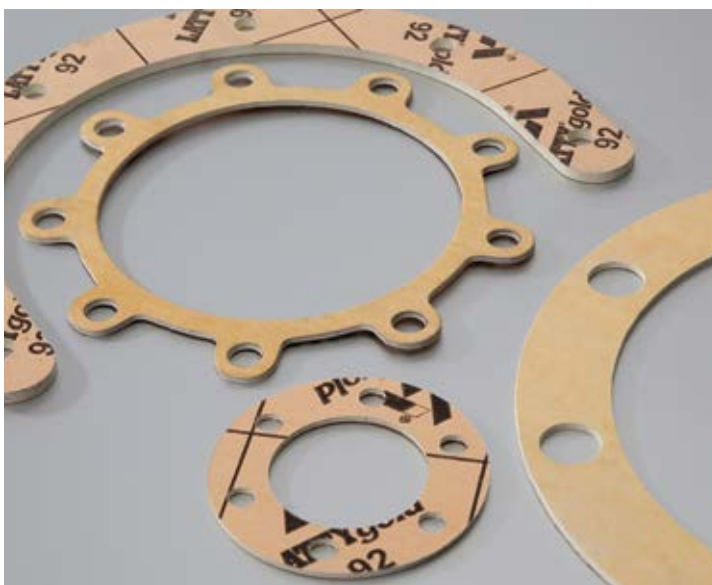

### OPERATING PARAMETERS (NOT ASSOCIATED)

Pressure : 0 to 100 bar  
 Temperature : 0 °C to 440 °C

### COMPOSITION

Gasket material made of synthetic fibres bonded together with a mix of NBR-SBR elastomers.

### TYPES OF INDUSTRIES



### FLUIDS

All types of fluids

### GUIDELINES, STANDARDS AND APPROVALS



Item	Dimensions	Description
21734	0,5 mm	1 m x 1,5 m
46349	0,5 mm	1,5 m x 2 m
27688	0,8 mm	1,5 m x 2 m
26221	0,8 mm	1 m x 1,5 m
2141151	1 mm	1 m x 1,5 m
28898	1 mm	1,5 m x 2 m
40210	1 mm	1,5 m x 1,5 m
21471151	1,5 mm	1 m x 1,5 m
27689	1,5 mm	1,5 m x 2 m
40337	1,5 mm	1,5 m x 1,5 m
21421151	2 mm	1 m x 1,5 m
26041	2 mm	1,5 m x 2 m
40338	2 mm	1,5 m x 1,5 m
21431151	3 mm	1 m x 1,5 m
27690	3 mm	1,5 m x 2 m
39897	3 mm	1,5 m x 1,5 m
24821	4 mm	1 m x 1,5 m
50025	4 mm	1,5 m x 2 m