



BRAIDED PACKINGS & RINGS

LATTYflon 4788




**100% aramid packing fibres,
very high mechanical performance.**

PMUC

Produits et Matières Utilisées en Conformité

www.latty.com



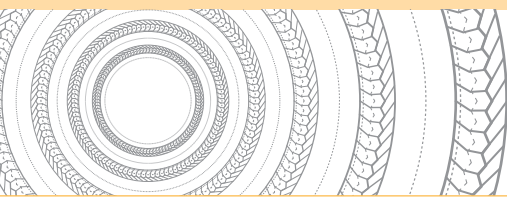

LATTYflon 4788

BRAIDED PACKINGS & RINGS

100% aramid packing fibres, very high mechanical performance.

Characteristics

- ▶ Packing made of 100% continuous aramid fibres. Each single yarn is impregnated with PTFE using our exclusive «Filcoat» process, then re-impregnated with a mix of PTFE and inert food-quality lubricant during plaiting operation.
- ▶ Available in preformed packing rings, on request.

Advantages

- ▶ Excellent resistance to abrasive fluids
- ▶ Incomparable mechanical resistance
- ▶ Packing longevity
- ▶ Silicone-free packing

Industries

- ▶ Food
- ▶ Chemical
- ▶ Sugar
- ▶ Petrochemical
- ▶ Pharmaceutical
- ▶ Pulp and paper mills
- ▶ Power stations

Equipment

- ▶ Volumetric and centrifugal pumps
- ▶ Agitators
- ▶ Mixers
- ▶ Crushers
- ▶ Screw conveyors

Parameters (not associated)

- ▶ Temperature : -220 °C to +300°C
- ▶ Pressure : 0 to 200 bar
- ▶ Speed : < 25 m/s
- ▶ pH : 2 - 13

Approval

- ▶ PMUC 17-044

Dimensions

- ▶ In square section of 5 to 26 mm.



The information given in this document is for guidance only and does not commit LATTY international in any way. LATTY international does not warrant the performance of its products, unless properly fitted and used in accordance with the instructions, nor can it accept any claim for consequential liability.. LATTY International S.A. is only liable for the quality of its products as it does not involve itself in their fitting or use, which must be done in accordance with the instructions.

Ref.: 21208 (12/2015) - LATTY BROU



Plant
 1, rue Xavier Latty
 F-28160 BROU, FRANCE
 Tél. +33 (0) 2 37 44 77 77
 Fax +33 (0) 2 37 44 77 99
 customerservice@latty.com



www.latty.com

