




TOOLS

Flow control valve



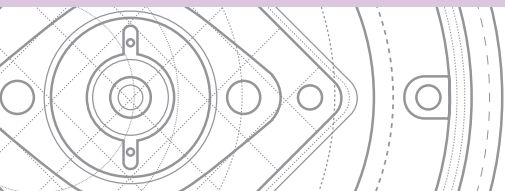

Flow control valve




TOOLS

The **LATTYlub Flowcontrol** flow controller is designed for applications requiring uninterrupted water flow. Adequate water flow for cooling and lubrication saves water and energy and reduces maintenance. Its robust modular construction and wide range of accessories make it very flexible.

Advantages

- ▮ Controls and monitors water flow and pressure in seals
- ▮ Prevents and reports packing and mechanical seal failures
- ▮ Allows for optimization of water consumption,
- ▮ Simplifies the operation of mechanical seals,
- ▮ Detects and locates problems in the pipes,
- ▮ Flow and pressure indicators with setpoint sliders,
- ▮ Optional alarms available.

Available models

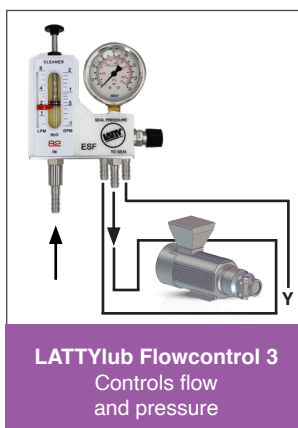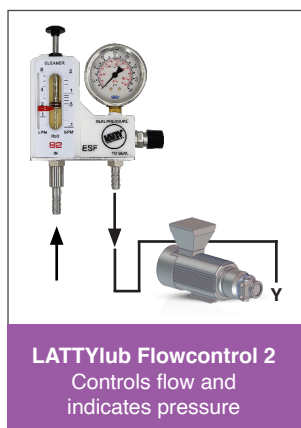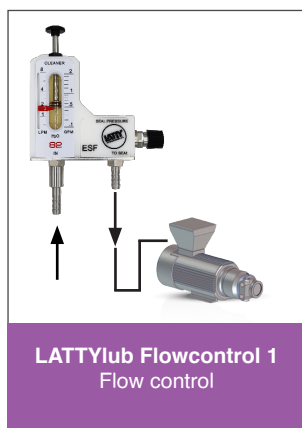



- ▮ **Flow rate range:**
0 -1 L/min - 0 - 8 L/min
0 - 13 L/min
- ▮ **Pressure range:**
Standard: 0-10 bar
Option: 0-25 bar
- ▮ **Temperature range:**
Standard: 100°C
Inox version: 130°C

Flow regulator support (option)

Provides visual access to operators when it is impossible to mount the flow regulator nearby.



Technical data

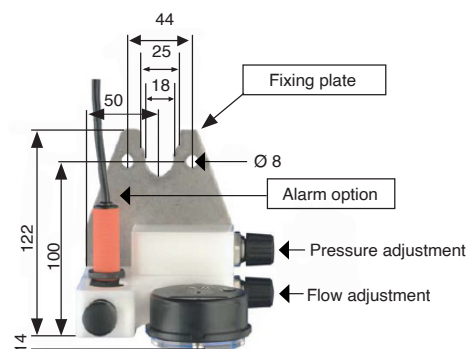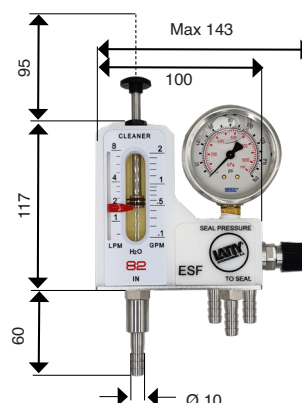

- ▮ **Construction:**
Housing: Polyamide
Pipe: Plexiglas
Steel parts: Steel 316
O-rings: Viton®
Weight: 1.2 kg

The information given in this document is for guidance only and does not commit LATTY international in any way. LATTY international does not warrant the performance of its products, unless properly fitted and used in accordance with the instructions, nor can it accept any claim for consequential liability. LATTY International S.A. is only liable for the quality of its products as it does not involve itself in their fitting or use, which must be done in accordance with the instructions.



PLANT
1, rue Xavier Latty
F-28160 BROU, FRANCE
Tel. +33 (0) 2 37 44 77 77
Fax +33 (0) 2 37 44 77 99
customerservice@latty.com



www.latty.com