




LATTY[®]graf REFLEX HP

GRAPHITE METAL GASKET, HIGH PERFORMANCE AND HIGH PRESSURE.



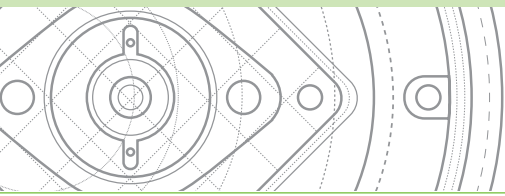

LATTY[®]graf REFLEX HP

STATIC SEALING

High temperature, high pressure, graphite metal gasket used in the most demanding applications.

Specifications

- ▶ Patented metal gasket, consisting of an expanded graphite sealing ring. The sealing ring is pressed between two stainless steel rings, which are used as a crush limiter (Metal to Metal contact).

Parameters (not associated)

- ▶ Pressure: 0 to 500 bar
- ▶ Temperature: -200 °C to +600 °C
- ▶ pH: 0-14

Industries

- ▶ Difficult applications

Fluids

- ▶ Water
- ▶ Steam
- ▶ Gas


Equipment

- ▶ Pressure vessels (manhole and handhole seals)
- ▶ Fittings
- ▶ Rotating machines
- ▶ Bolted assemblies

Advantages


- ▶ Supports extreme and variable operating conditions
- ▶ Designed for metal to metal contact
- ▶ Crush limiter that protects the seal and withstands all mechanical stresses
- ▶ Excellent elastic recovery of the densified graphite ring, which ensures a durable and flawless seal

Design and manufacture adapted to the geometry of your equipment

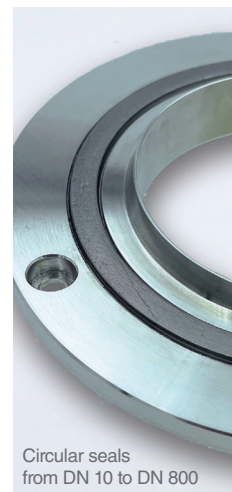


Circular seals from DN 10 to DN 800

- ▶ Standard design for flat face, raised face or socket flanges.

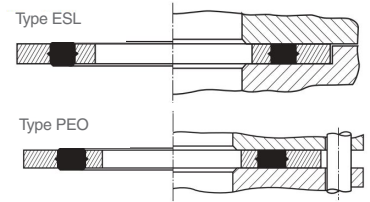

- ▶ Ensures metal-to-metal contact at flanges for single or double sockets



The information contained in this document is for information purposes only and cannot incur the liability of LATTY international in any way. We do not guarantee our product performances in cases of defective assembly or use not compliant with the given instructions. LATTY international only answers for the quality of its products, it has no role in their assembly or use which must be in line with trade practice.



Production site
 1, rue Xavier Latty
 28160 BROU, FRANCE
 Tél. : +33 (0) 2 37 44 77 77
 Fax : +33 (0) 2 37 44 77 99
 customerservice@latty.com



www.latty.com