





BRAIDED PACKINGS & RINGS

LATTYtex 2761

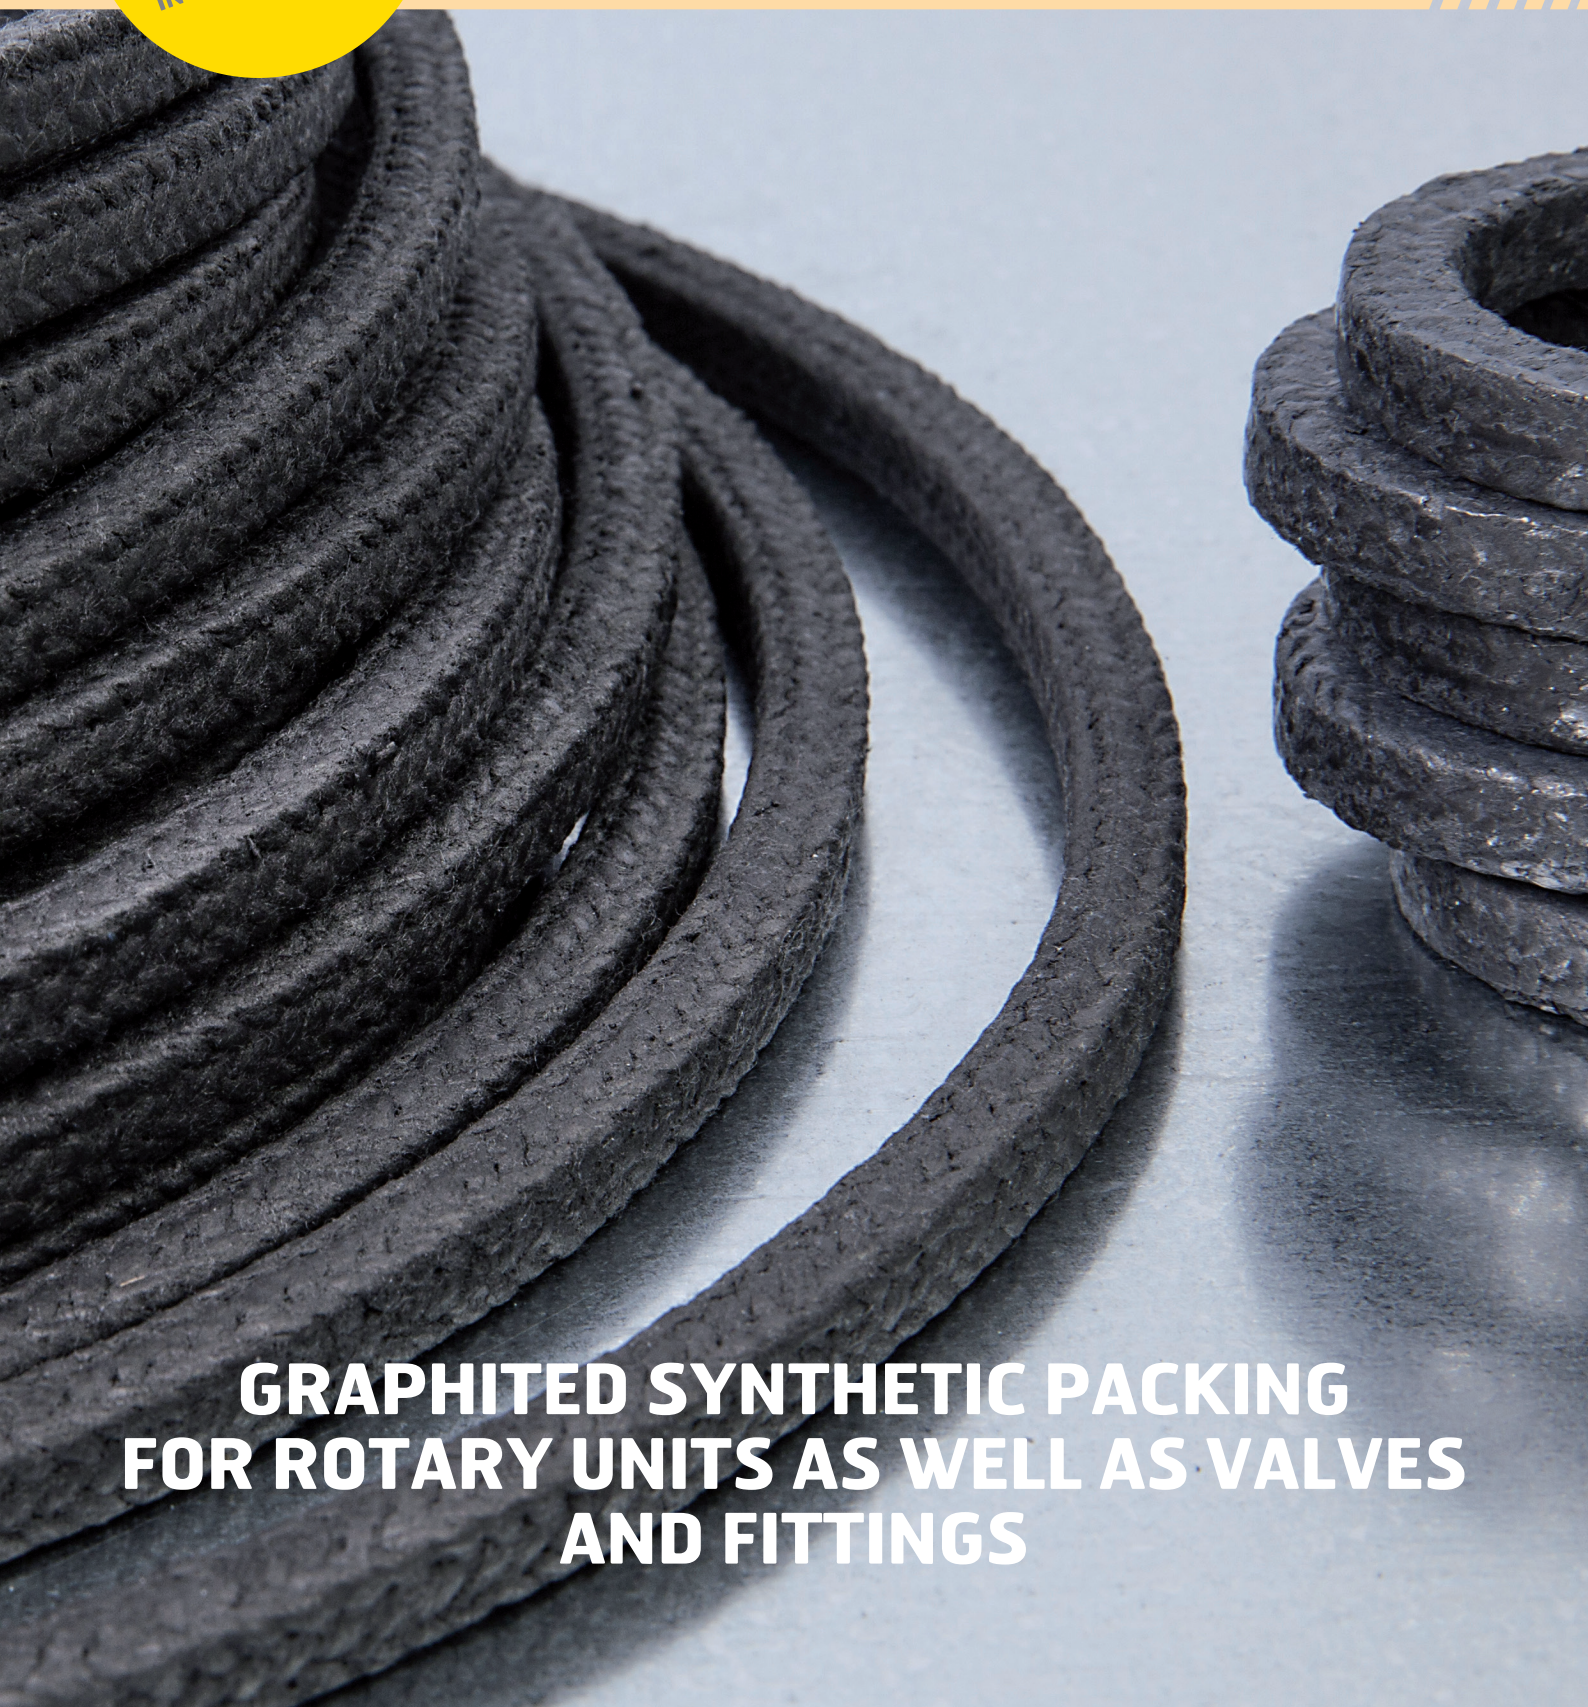

**GRAPHITED SYNTHETIC PACKING
FOR ROTARY UNITS AS WELL AS VALVES
AND FITTINGS**

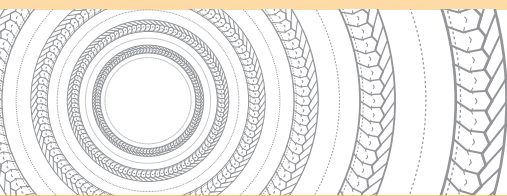

LATTYtex 2761

BRAIDED PACKINGS & RINGS

Graphited synthetic packing for rotary units as well as valves and fittings

Characteristics

- › Packing made of special polyacrylic yarns. Each single yarn is impregnated with PTFE using our exclusive «Filcoat»-process. They are then re-impregnated in a bath consisting with a mix of graphite and special lubricants during braiding operation.
- › Its mechanical properties make it an outstanding packing for rotary units. Its composition provides high resistance to moderately aggressive fluids.

Advantages

- › Easy running-in
- › Little wear to sleeve
- › Good resistance to moderately aggressive fluids
- › Provides suppleness and resistance
- › Cutting and fitting made easier

Equipments

- › Rotary units
- › Low-pressure valves

Industries

- › Food processing
- › Petrochemicals
- › Pharmaceuticals
- › Sugar
- › Paper
- › Power stations

Parameters (not associated)

- › Temperature: -50°C to +260°C
- › Pressure: 0 to 100 bar
- › Speed: < 15 m/s
- › pH: 1 to 13

Dimensions

- › Available in square sections from 4 to 25.4 mm*
- › On request, available as preformed rings.

**Other dimensions on request*



The information given in this document is for guidance only and does not commit LATTY international in any way. LATTY international does not warrant the performance of its products, unless properly fitted and used in accordance with the instructions, nor can it accept any claim for consequential liability.. LATTY International S.A. is only liable for the quality of its products as it does not involve itself in their fitting or use, which must be done in accordance with the instructions.

Réf. : 21205 (10/2017) - LATTY BROU



Plant
1, rue Xavier Latty
F-28160 BROU, FRANCE
Tél. +33 (0) 2 37 44 77 77
Fax +33 (0) 2 37 44 77 99
customerservice@latty.com



www.latty.com