


## **LATTYflon 4488**



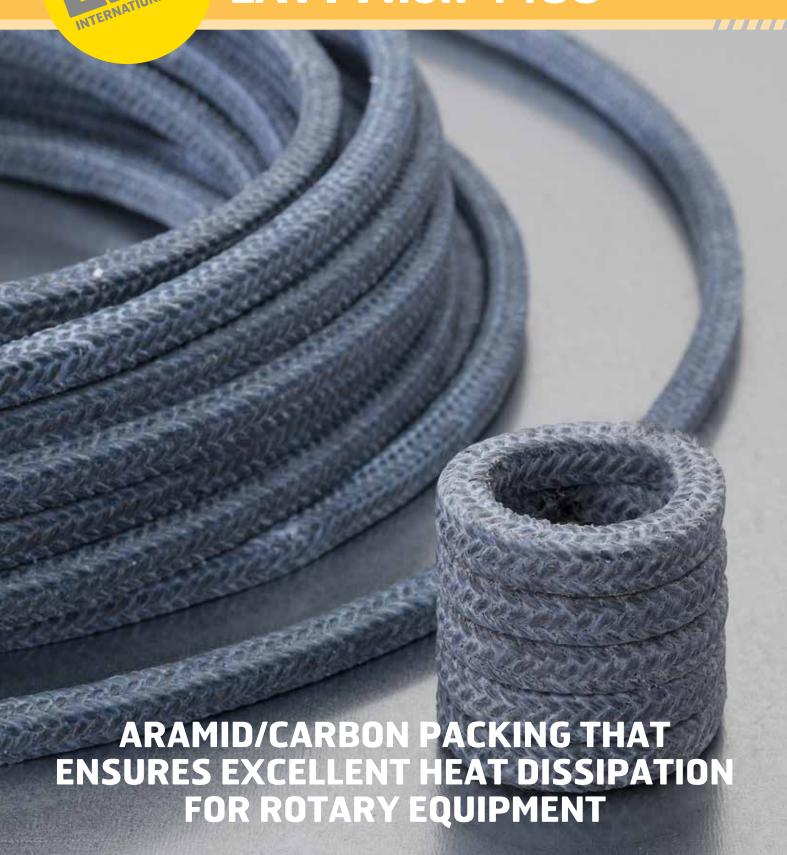

## **LATTYflon 4488**

#### **BRAIDED PACKINGS & RINGS**

# Aramide/carbon packing that ensures excellent heat dissipation for rotary equipment.

#### **Characteristics**

- Packing made of carbon/aramide, each single yarn being impregnated with PTFE using our exclusive Filcoat-process. The packing is then re-impregnated during braiding operation in a bath consisting of PTFE mixed with an inert food-approved lubricant.
- The combination of the mechanical characteristics of aramide associated with the heat dissipation properties of carbon account for the outstanding performance of LATTYflon 4488.

### **Advantages**

- High heat dissipation
- Good resistance at high speeds
- Suitable for slurries or abrasive fluids
- Withstands high temperatures and/or pressures
- Efficient even with worn sleeves

## **Equipment**

- Pumps
- Mixers
- Stirrers
- Screw conveyors

#### **Industries**

- Food processing
- Petrochemicals
- Pharmaceuticals
- Sugar
- Paper
- Power stations

### Parameters (not associated)

Temperature: -220°C to +300°C
 Pressure: 0 to 300 bar
 Speed: < 30 m/s</li>
 pH: 1 - 13

#### **Dimensions**

- Available in square section from 4 to 25,4 mm
- On request, available as preformed rings.









The information given in this document is for guidance only and does not commit LATTY international in any way. LATTY international does not warrant the performance of its products, unless properly fitted and used in accordance with the instructions, nor can it accept any claim for consequential liability. LATTY International S.A. is only liable for the quality of its products as it does not involve itself in their fitting or use, which must be done in accordance with the instructions.



Plant
1, rue Xavier Latty
F-28160 BROU, FRANCE
Tél. +33 (0) 2 37 44 77 77
Fax +33 (0) 2 37 44 77 99
customerservice@latty.com









Réf.: 21209 (10/2017) - LATTY BROU