




BRAIDED PACKINGS & RINGS

LATTYflon 4758



**Versatile, high-performance packing
for reciprocating and rotating machines
with aggressive fluids.**

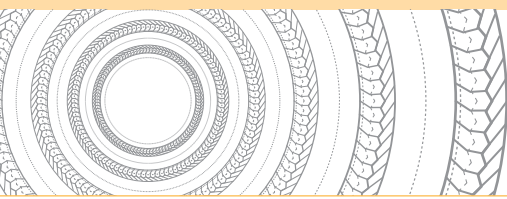

LATTYflon 4758

BRAIDED PACKINGS & RINGS

Versatile, high-performance packing for reciprocating and rotating machines with aggressive fluids.

Characteristics

- ▶ Multi-yarn packing: the edges of the packing are made of 100% aramid yarns impregnated with PTFE using our exclusive «Filcoat» process
- ▶ Friction faces 100% silicone-free PTFE lubricated and then re-impregnated during plaiting operation with a mix of PTFE
- ▶ Ideal as a preformed ring for “slow-moving” applications (reciprocating pumps, mixers, stirrers, etc.) on abrasive or heavily contaminated fluids.
- ▶ Available as preformed packing rings, on request.

Advantages

- ▶ Excellent mechanical resistance
- ▶ Good resistance to abrasive fluids
- ▶ Self lubricating
- ▶ Silicone-free packing

Dimensions

- ▶ Square section of 4 to 25.4 mm.

Industries

- ▶ Chemical
- ▶ Agro-chemical
- ▶ Petrochemical
- ▶ Food-processing
- ▶ Sugar
- ▶ Cement works
- ▶ Mining operations

Materials

- ▶ Reciprocating pumps
- ▶ Mixers
- ▶ Stirrers
- ▶ Powder conveyors
- ▶ Rotary pumps

Parameters (not associated)

- ▶ Pressure: 0 to 1000 bar
- ▶ Temperature: -220 °C to +300°C
- ▶ Speed: < 10 m/s
- ▶ pH: 2 - 14



The information given in this document is for guidance only and does not commit LATTY international in any way. LATTY international does not warrant the performance of its products, unless properly fitted and used in accordance with the instructions, nor can it accept any claim for consequential liability.. LATTY International S.A. is only liable for the quality of its products as it does not involve itself in their fitting or use, which must be done in accordance with the instructions.



Plant
1, rue Xavier Latty
F-28160 BROU, FRANCE
Tél. +33 (0) 2 37 44 77 77
Fax +33 (0) 2 37 44 77 99
customerservice@latty.com



www.latty.com