



PACKINGS

PREFORMED PACKING RINGS

LATTYgraf 6745 NG

NEW



CARBON PACKING WITH REDUCED FRICTION

For fittings, pumps and valves
high pressure, high temperature
up to 600°C.

www.latty.com



LATTYgraf 6745 NG


PACKINGS PREFORMED PACKING RINGS

LATTYgraf 6745 NG contains a corrosion inhibitor developed from an exclusive process to provide unlimited protection of the stem, stuffing box housing and stuffing box over time.

Packing made from continuous carbon yarns and impregnated yarn-to-yarn with PTFE using our patented filcoat process. It is then re-impregnated during braiding with a graphite-and-PTFE-based mix to ensure optimum performance of pumps and valves.

Advantages

- High resistance to significant temperature or pressure variations
- Reduced operating effort
- The corrosion inhibitor (exclusive LATTY process) durably protects the parts of the fitting
- Ready-to-use preformed rings: quick stuffing box implementation and replacement, reduced production downtime
- Reduced maintenance costs and increased equipment service life
- Multi-purpose: suitable for a large number of applications
- Made in France

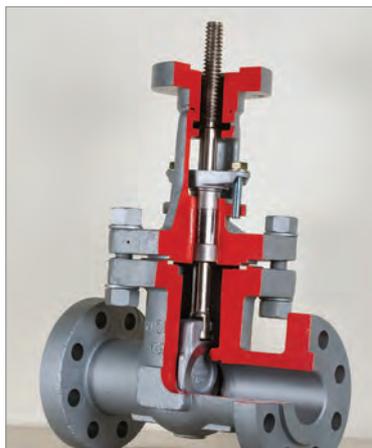

Homologations

- AECL Valves (Atomic Energy Canada Limited) as sets of preformed rings and/or used in conjunction with LATTYflon 3265 LM LATTYgraf 6745 NG

Product	Temperature	Pressure	pH
LATTYgraf 6745 NG	+450°C to +650°C	300 bar	0-14

Applications (all fluids)

- Chemical industry
- Petrochemical industry
- Energy production
- Refineries



The information given in this document is for guidance only and does not commit LATTY international in any way. LATTY international does not warrant the performance of its products, unless properly fitted and used in accordance with the instructions, nor can it accept any claim for consequential liability.



Plant
1, rue Xavier Latty
F-28160 BROU, FRANCE
Tél. +33 (0) 2 37 44 77 77
Fax +33 (0) 2 37 44 77 99
customerservice@latty.com



www.latty.com

Réf: 90005132 (05/2011)