JOINTS / GARNITURES MECANIQUES / RACCORDS TOURNANTS / TRESSES / JOINTS / GARNITURES MECANIQ / FLACHDICHTUNGEN / BLEITRINGDICHTUNGEN / DREHDURCHFÜHRUNG / PACKUNGEN / FLACHDICHTUNG KINGS / JOINTINGS / MECHANICAL SEALS / ROTARY UNIONS / PACKINGS / JOINTINGS / MECHANICAL SEALS QUETADURA / CIERRES MECANICOS / JUNTAS ROTATIVAS / EMPAQUETADURAS / JUNTAS / CIERRES MECANICOS / STATIC SEALING



LATTY®graf S




GATE GASKET SPECIALLY DESIGNED FOR TRIPLE OFFSET BUTTERFLY VALVE









LATTY® graf S

STATIC SEALING

Gate gasket specially designed for triple offset butterfly valve.

The gate gasket LATTYgraf S is a multilayer gasket made of c compressed graphite and metal. Its high elastic recovery provides perfect sealing, optimum reliability and reduced maintenance. The gasket LATTYgraf S meets the requirements of the harshest applications.

Advantages

- Withstands very significant temperature variations
- Reduced friction coefficient
- Improved sealing lifespan
- Little wear of the seal only
- Available in two versions: gasket on obturator (version 1) or in the the valve body (version 2)

Other materials available


Metal layers:

Stainless steel, Duplex, Hastelloy, Incoloy, Nitronic, etc.


Non-metal layers:
Graphite with 98 to 99.85% carbon, MICA, PTFE, etc.

Equipment

Double, triple or quadruple offset butterfly valves



Version 1:
Gasket on obturator, sealing face on outside gasket.



Version 2 : Gasket in body valve, sealing face on inner gasket.


Standard parameters



- Refinery
- Chemicals
- Energy

Fluids

- Cryonegics
- Gas
- Liquid
- Steam

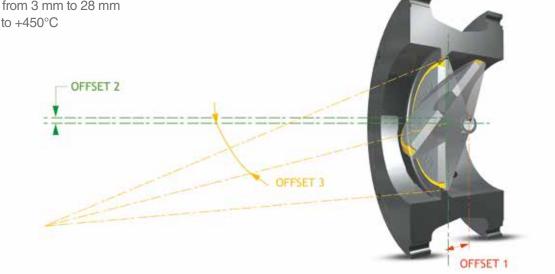

The information given in this document is for guidance only and does not commit LATTY international S.A. in any way. LATTY international does not warrant the performance of its products, unless properly fitted and used in accordance with the instructions, nor can it accept any claim for consequential liability. LATTY International S.A. is only liable for the quality of its products as it does not involve itself in their fitting or use, which must be done in accordance with the instructions.



1, rue Xavier Latty 28160 BROU, FRANCE Tél.: +33 (0) 2 37 44 77 77 Fax: +33 (0) 2 37 44 77 99 customerservice@latty.com







www.latty.com